




BRASS GATE VALVE

200 WOG
Designed in accordance with the
requirements of California AB 1953
and Vermont S 152

UP667 & UP668



WQA tested and Certified
against WQA ORD0902
for California "lead free"
compliance.

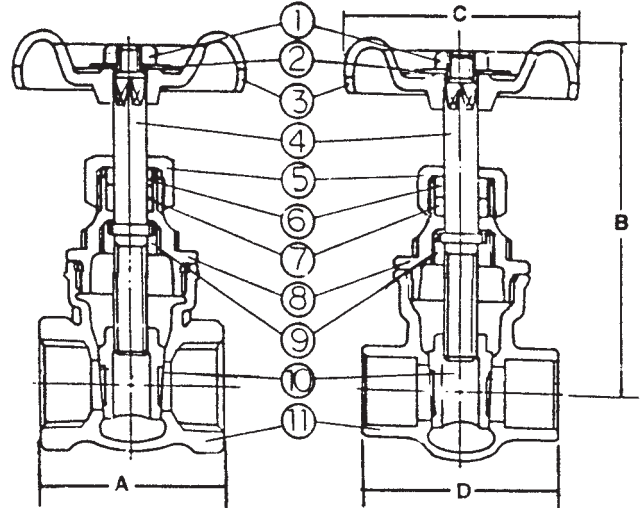

UP667 Threaded

UP668 Solder

| DIMENSIONS (INCHES) | | | | Approx. Weight | Approx. Weight | C _v |
|---------------------|------|------|------|----------------|----------------|----------------|
| SIZE | A | B | C | 667 | 668 | |
| 1/4 | 1.63 | 2.84 | 2.13 | - | 0.60 | 5.6 |
| 3/8 | 1.63 | 2.84 | 2.13 | 1.63 | 0.60 | 10.7 |
| 1/2 | 1.69 | 2.91 | 2.13 | 1.78 | 0.63 | 17.6 |
| 3/4 | 1.84 | 3.31 | 2.13 | 2.31 | 0.88 | 32 |
| 1 | 2.19 | 3.94 | 2.41 | 2.84 | 1.25 | 54 |
| 1 1/4 | 2.42 | 4.34 | 2.94 | 3.00 | 1.75 | 97 |
| 1 1/2 | 2.44 | 4.94 | 2.94 | 3.22 | 2.12 | 135 |
| 2 | 2.84 | 6.03 | 3.19 | 3.97 | 3.20 | 230 |

RATING

- 200 LB POTABLE WATER SERVICE

FEATURES

- FORGED BRASS BODY
- THREADED OR SOLDER ENDS
- THREADED BONNET
- INTEGRAL SEAT
- ADJUSTABLE PACKING NUT
- NON-RISING STEM
- FORGED SOLID WEDGE DISC
- IRON HANDWHEEL
- 100% FACTORY TESTED
- INTERNATIONAL

| MATERIAL SPECIFICATION | | | |
|------------------------|---------------|----------------------------------|--------------------|
| 1 | Handwheel Nut | Brass | ASTM B16 |
| 2 | Nameplate | Aluminum Sheet | Commercial |
| 3 | Handwheel | Cast Iron | ASTM A48, Class 35 |
| 4 | Stem | Brass | B283 C69300 |
| 5 | Packing Nut | Forged Brass | B283 C69300 |
| 6 | Gland | Brass Rod | B283 C69300 |
| 7 | Packing Ring | Non-Asbestos Synthetic Fibers | |
| 8 | Bonnet | Forged Brass | B283 C69300 |
| 9 | Locknut | Brass Rod | B283 C69300 |
| 10 | Wedge | Forged Brass | B283 C69300 |
| 11 | Body | Forged Brass | B283 C69300 |

Rev. 5

Milwaukee Valve Company
16550 W. Stratton Drive
New Berlin, WI 53151
Phone: 262-432-2700
Fax: 262-432-2701

Note: Lead free refers to the wetted surface of the pipe, fittings and fixtures in potable water systems that have a weighted average lead content $\leq 0.25\%$. Source: California Health and Safety Code (116875).

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the Installation, Operation and Maintenance Manual (IOM) see the engineering section on our website. For the most current information access www.milwaukeevalve.com

